

**"U.S. PUBLIC LAND SURVEY MONUMENT RECORD"
OZAUKEE COUNTY, WISCONSIN**

TYPE OF MONUMENT: bernsten aluminum monument

STATE PLANE COORDINATES: N: 543562.03

E: 2581135.24

ELEVATION: 668.25 **M.S.L. DATUM:** 1929

FIELD BOOK: book 2 **PAGE:** 2

FIELDWORK BY: Kapur and Associates

RECORD DRAWN BY: MARK BANTON

CONTROL ACCURACY:


HORIZONTAL: 3RD ORDER, CLASS 1 **VERTICAL:** 3RD ORDER

CORNER INDEX No. 807

SECTION 36

TOWNSHIP 12

RANGE 22



LOCATION

BASIS OF MONUMENT LOCATION

SEAL:

TOM GENSKE -1981 - EXCAVATED AT PK NAIL SET BY NELSON AND VANSLUYS AT CENTERLINE OF SANDY BEACH RD AND FENCELINE TO THE SOUTH. FOUND LIMESTONE MONUMENT (TOP BROKEN OFF BY OUR BACKHOE) 0.33' SOUTH AND 0.50' EAST OF PK NAIL. USED CENTER OF LIMESTONE AND REPLACED WITH BERNTSEN ALUMINUM MONUMENT.

TOM GENSKE -1991 - REPLACED OLD TIES WITH 5/8" REBAR w/ALUMCAP

MARK BANTON -2005 REDRAW DOSSIER TO SHOW CO-ORDINATES AND ELEVATION




**DATA SHOWN HEREBON
IS CERTIFIED AS CORRECT:**

Mark Banton

Ozaukee County Surveyor

DATE: 9/14/09

TIE SKETCH

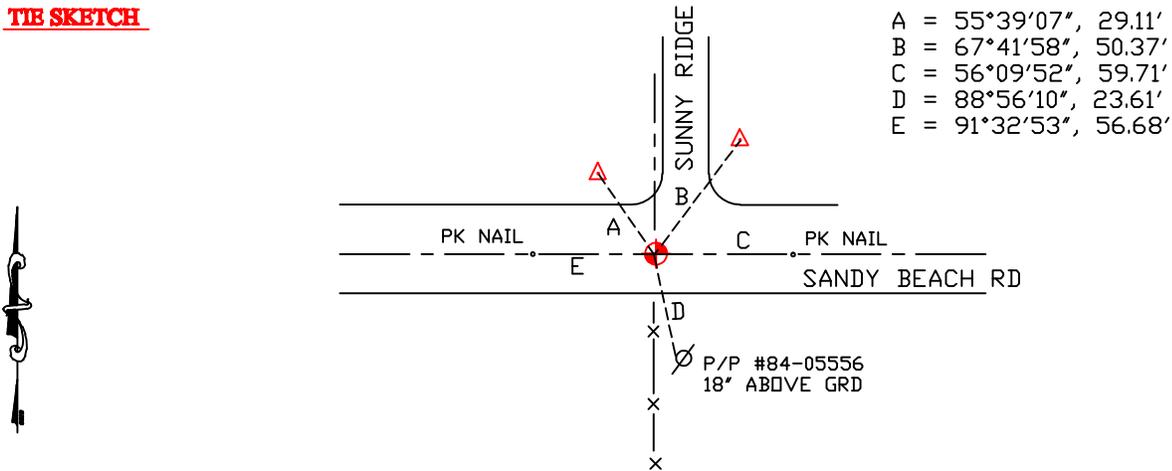

- A = 55°39'07", 29.11'
- B = 67°41'58", 50.37'
- C = 56°09'52", 59.71'
- D = 88°56'10", 23.61'
- E = 91°32'53", 56.68'

MAINTENANCE RECORD

- MONUMENT LEGEND**
- BERNTSEN MONUMENT (SEE TYPE OF MON. ABOVE)
 - CONCRETE MONUMENT w/ BRASS CAP
 - CONCRETE MONUMENT w/ CROSS
 - 5/8" REBAR WITH ALUMINUM CAP

DATE	BY WHOM	REMARKS
15 SEPT 09	m. banton	re-number corner