



W 1/4 OF SECTION 9 T. 12 N; R. 22 E.

(c)(d)(e) Plan view of corner with ties to at least 4 witness monuments. If in disagreement with previously established corner, show the distances between the two corners and also indicate the ties to the disputed corner.

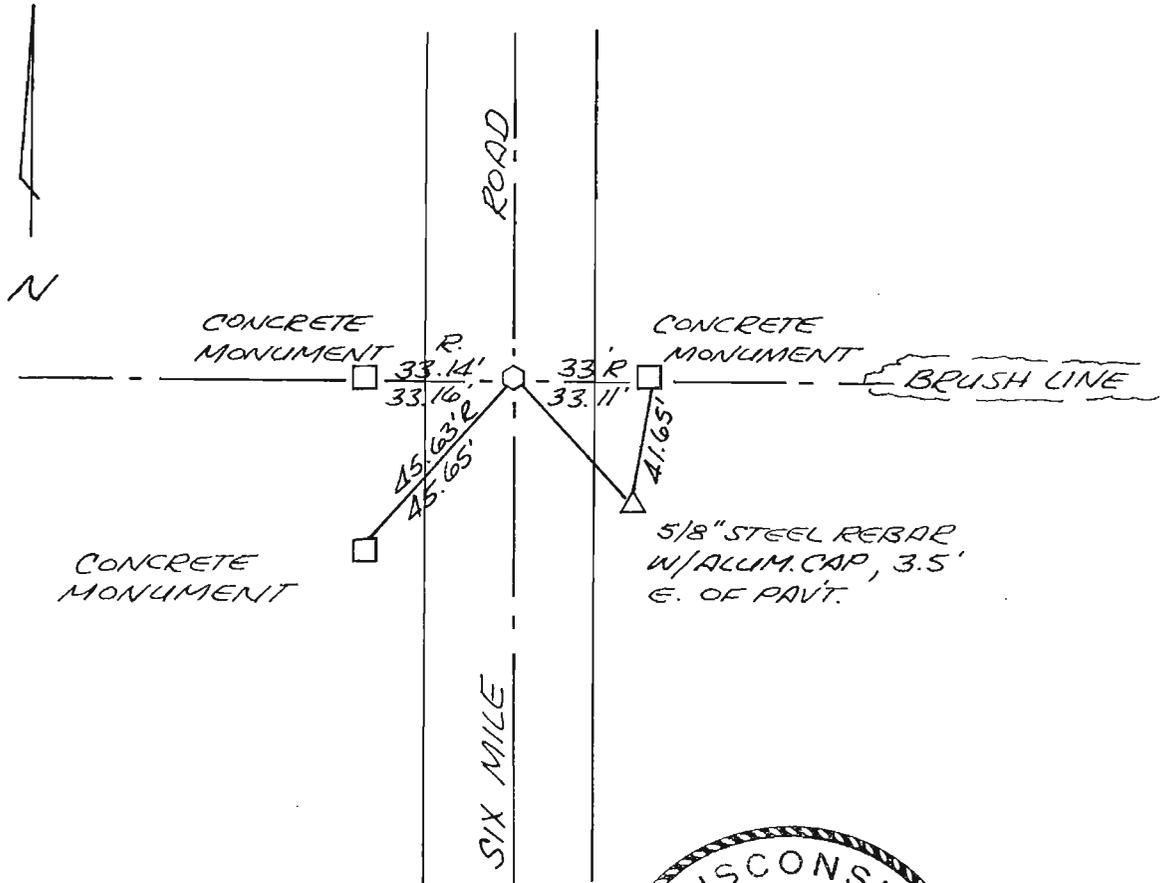

**MAINTENANCE RECORD**

Date	Init	Remarks

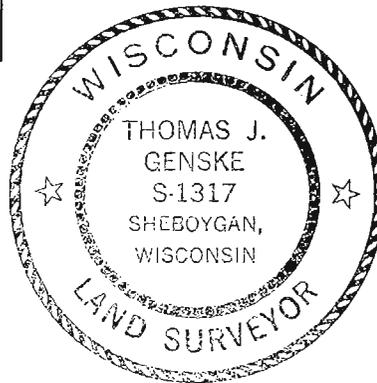

(i) I, THOMAS J. GENSKÉ s- 1317  
 (type or print name) certify that the corner location on  
 this record was determined by me or under my direction  
 and control and that this U.S. Public Land Survey Monument  
 Record is correct and complete to the best of my knowledge  
 and belief.

Signature Thomas J. Genske Date 2/26/92 INDEX NO. 44  
 COUNTY SURVEYOR

# OZAUKEE COUNTY

## U.S. PUBLIC LAND SURVEY MONUMENT RECORD

Note: This form is intended and designed to fulfill all requirements of Wisconsin Administrative Code, Chapter A-E 5.02, U.S. Public Land Survey Monument Record (3)(a)(b)(c)(d)(e)(f)(g)(h)(i).

(a) CORNER LOCATION: W 1/4 SECTION 9

TOWNSHIP 12 NORTH

RANGE 22 EAST

TOWN/CITY/VILLAGE BELGIUM

STATE PLANE COORDINATES OF CORNER: \_\_\_\_\_  
NORTH \_\_\_\_\_  
EAST \_\_\_\_\_

ELEVATION OF CORNER: \_\_\_\_\_ THETA ANGLE: \_\_\_\_\_  
Horizontal Datum: Wisconsin State Plane Coordinate System, South Zone  
NORTH AMERICAN DATUM 1927 1983  
Vertical Datum: National Geodetic Vertical Datum of 1929

(b)(f)(g)(h) Description of monument found at this corner and if it was accepted, state all evidence (material, testimonial, occupational, plats, records, other monuments) used as a basis for accepting. If not accepted or if nothing was found, state evidence used as a basis for establishing location. If reestablished through lost corner proportionate methods, indicate all monuments, distances and directions used to establish.

Using three concrete witness monuments set in 1973 by County Surveyor, Harry Brabender, S-294 to tie in a found limestone monument called for on L. Tousley's 1878 remonumentation map, I found a pk nail in pavement surface. No other monuments found. Roadway in a 3 to 4 foot fill area. Pk nail checked recorded tie distances. Accepted pk nail as corner and replaced with a Berntsen Aluminum monument with a 2 inch riser.

22  
INDEX NO 44