

**"U.S. PUBLIC LAND SURVEY MONUMENT RECORD"  
OZAUKEE COUNTY, WISCONSIN**

TYPE OF MONUMENT: concrete monument w/ brass cap

STATE PLANE COORDINATES: N: 551455.57

E: 2580865.42

ELEVATION: 689.01 M.S.L. DATUM: 1929

FIELD BOOK: \_\_\_\_\_ PAGE: \_\_\_\_\_

FIELDWORK BY: KAPUR AND ASSOCIATES-1999

RECORD DRAWN BY: MARK BANTON

CONTROL ACCURACY:


HORIZONTAL: 3RD ORDER, CLASS 1 VERTICAL: 3RD ORDER

CORNER INDEX No. 905

SECTION 24

TOWNSHIP 12

RANGE 22



LOCATION

SEAL:



BASIS OF MONUMENT LOCATION

Dennis Van Sluys-RLS 1238 - set a 1" iron pipe, replacing a found 2" wood hub in conjunction with a survey of Risch Farm

Kapur and Associates -1999 replaced 1" iron pipe with a concrete monument with a brass cap and set ties.


Mark Banton 2006- redraw dossier to show co-ordinates and elevation of corner.

DATA SHOWN HEREON  
IS CERTIFIED AS CORRECT:

*Mark Banton* 2-5-07  
Ozaukee County Surveyor

DATE: 01-05-2005

TIE SKETCH

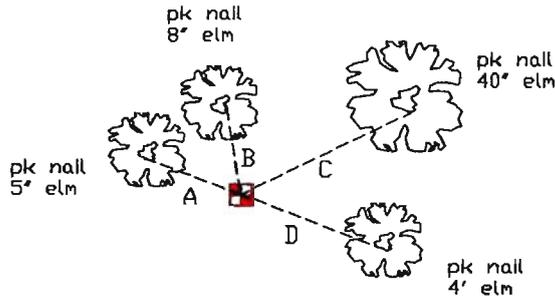

- A = 7.53'
- B = 7.45'
- C = 15.59'
- D = 11.31'

MAINTENANCE RECORD

DATE	BY WHOM	REMARKS
1/31/07	M.BANTON	ADD NEW CORNER NUMBER

MONUMENT LEGEND

- = BERNTSEN MONUMENT (SEE TYPE OF MON. ABOVE)
- = CONCRETE MONUMENT w/ BRASS CAP
- = CONCRETE MONUMENT w/ CROSS
- = 5/8" REBAR WITH ALUMINUM CAP