

# "U.S. PUBLIC LAND SURVEY MONUMENT RECORD" OZAUKEE COUNTY, WISCONSIN

TYPE OF MONUMENT: Concrete Monument w/ brass cap

STATE PLANE COORDINATES: N: 570004.07

E: 2580377.52

ELEVATION: 687.48 M.S.L. DATUM: 1929

FIELD BOOK: K&A folder PAGE: 864


FIELDWORK BY: KAPUR AND ASSOCIATES

RECORD DRAWN BY: MARK BANTON

CONTROL ACCURACY:

HORIZONTAL: 3RD ORDER CLASS 1 VERTICAL: 3RD ORDER

|                  |      |
|------------------|------|
| CORNER INDEX No. | 1067 |
| SECTION          | 1    |
| TOWNSHIP         | 12   |
| RANGE            | 22   |

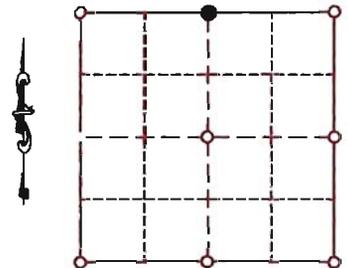

LOCATION

### BASIS OF MONUMENT LOCATION

11/22/66 Foster Curtiss, S-182 Town of Belgium. Recovered the base of a limestone monument- 3.5' north of the traveled centerline of roadway. Replaced stone with a 36" x 8" concrete monument w/ brass cap. The top of old stone monument was found in the fence corner south. We used this top as a reference mark and set it in the fence line 33' south of the concrete monument.

08/26/93 - Ed Harvey Jr. S-1489, found 3"lp filled w/ concrete w/brass caps in them at both the Ozaukee Corner and the Sheboygan corner. Set ties as shown.

2/10/05 -Mark Banton, S-1691, using Kapur notes and Dossier on file prepared by Ed Harvey Jr., S-1489, drew Ozaukee county Dossier to show co-ordinates and elevation of corner.

SEAL:




DATA SHOWN HEREON  
IS CERTIFIED AS CORRECT:

*Mark Banton*  
Ozaukee County Surveyor

DATE: 10 FEBRUARY 2005 *1-29-07*

### TIE SKETCH

- A= 37.83'
- B= 45.29'
- C= 50.42'
- D= 40.83'
- E= 38.64'
- F= 44.19'
- G= 78.47'
- H= 64.88'

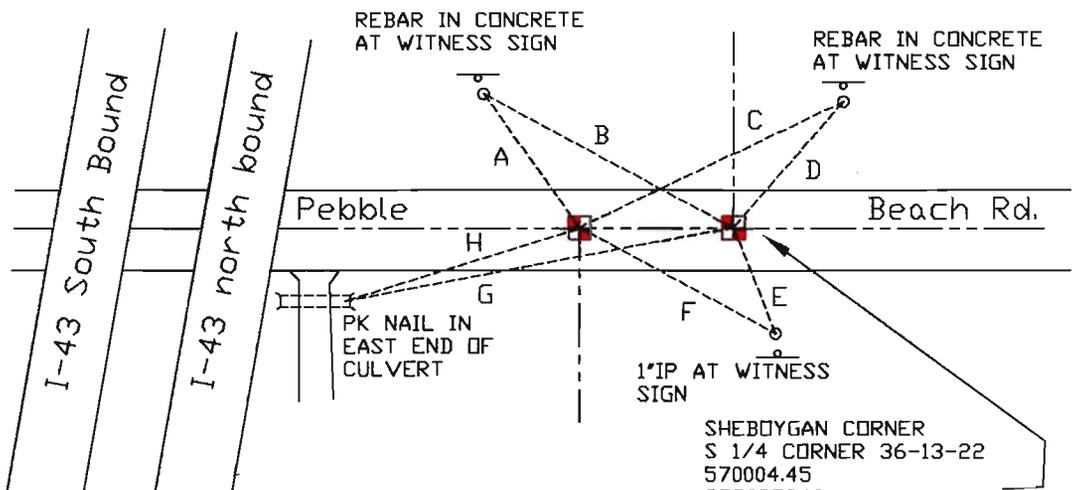

### MAINTENANCE RECORD

| DATE    | BY WHOM   | REMARKS              |
|---------|-----------|----------------------|
| 1/29/07 | M. BANTON | CHANGE CORNER NUMBER |
|         |           |                      |
|         |           |                      |

#### MONUMENT LEGEND

- = BERNTSEN MONUMENT ( SEE TYPE OF MON. ABOVE)
- = CONCRETE MONUMENT W/ BRASS CAP
- = CONCRETE MONUMENT W/ CROSS
- = 5/8" REBAR WITH ALUMINUM CAP