


**"U.S. PUBLIC LAND SURVEY MONUMENT RECORD"  
OZAUKEE COUNTY, WISCONSIN**

TYPE OF MONUMENT: Concrete Monument w/ brass cap PK NAIL  
 STATE PLANE COORDINATES: N: 569869.23 AT SURFACE  
E: 2575087.94  
 ELEVATION: 758.16 M.S.L. DATUM: 1929

CORNER INDEX No. 1071  
 SECTION 2  
 TOWNSHIP 12  
 RANGE 22

FIELD BOOK: \_\_\_\_\_ PAGE: \_\_\_\_\_  
 FIELDWORK BY: SHEBOYGAN COUNTY SURVEYOR 1994  
 RECORD DRAWN BY: MARK BANTON



LOCATION

CONTROL ACCURACY:

HORIZONTAL: 3RD ORDER, CLASS 1 VERTICAL: 3RD ORDER

BASIS OF MONUMENT LOCATION

HOLLAND CORNER- 1974 Steven Chronis S-913, dug 17'x7' hole, at 3' deep hit stake and stones  
 BELGIUM CORNER- 1975 Dennis Van Sluys S-1238, dug a 17'x7'x3' deep hole hit stake and stones at s-1/4 corner section 35-13-22. Established N-1/4 corner of Section 2 per gov't miss  
 11/17/75 - Peter F Wood, S-1206, set poured in place concrete monument w/brass cap at grade for both corners after road construction was complete tie bk 1 pg 49  
 4/24/89 Ed Harvey Jr S-1489, fund concrete monument w/brass cap at both corners  
 6/02/89 Ed Harvey Jr S-1489, Set PK nails at grade on both corners after road resurfacing. Tied as shown  
 4/19/94 Ed Harvey Jr. S-1489 fnd PK nails at grade as shown

SEAL:




DATA SHOWN HEREON  
 IS CERTIFIED AS CORRECT:

*Mark Banton 5 Feb 07*  
 Ozaukee County Surveyor

DATE: 10 FEBRUARY 2005

TIE SKETCH

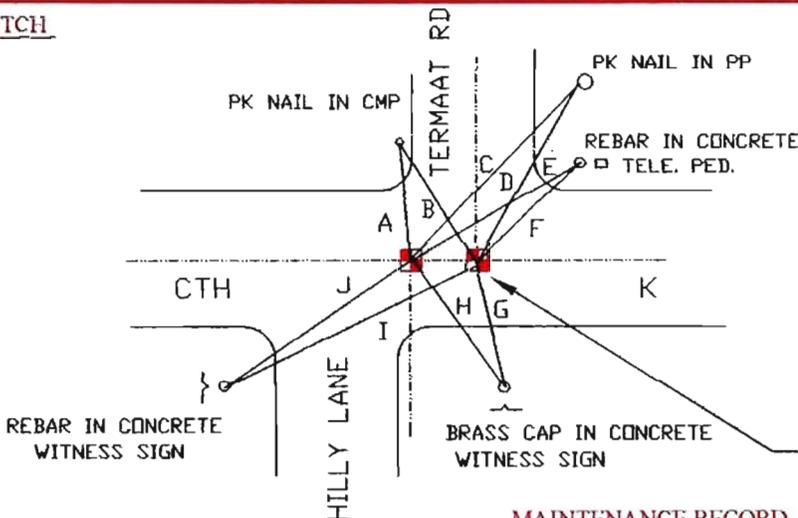

- A= 30.97'
- B= 33.29'
- C= 54.45'
- D= 52.29'
- E= 49.06'
- F= 46.78'
- G= 32.63'
- H= 33.34'
- I= 55.36'
- J= 52.23'

NOTE: SECTION CORNERS ARE COVERED WITH ASPHALT AND PK NAILS MARK LOCATION

SHEBOYGAN COUNTY CORNER  
 S.1/4 CORNER 35-13-22  
 N: 569869.32  
 E: 2575091.63  
 ELEV: 758.13  
 OZAUKEE COUNTY MONUMENT # 1070

MAINTENANCE RECORD

- MONUMENT LEGEND
- = BERNTSEN MONUMENT ( SEE TYPE OF MON. ABOVE)
  - = CONCRETE MONUMENT w/ BRASS CAP
  - = CONCRETE MONUMENT w/ CROSS
  - = 5/8" REBAR WITH ALUMINUM CAP

DATE	BY WHOM	REMARKS
5 FEB 07	M. BANTON	RE-NUMBER CORNER