

**"U.S. PUBLIC LAND SURVEY MONUMENT RECORD"
OZAUKEE COUNTY, WISCONSIN**

CORNER INDEX No. 1072

TYPE OF MONUMENT: Concrete Monument w/ brass cap sheared off

SECTION 2

STATE PLANE COORDINATES: N: 569810.77

TOWNSHIP 12

E: 2572476.28

RANGE 22

ELEVATION: 723.28 M.S.L. DATUM: 1929


FIELD BOOK: K&A Folder PAGE: 861

FIELDWORK BY: Kapur and Associates 1999

RECORD DRAWN BY: MARK BANTON

CONTROL ACCURACY:

HORIZONTAL: 3RD ORDER CLASS 1 VERTICAL: 3RD ORDER

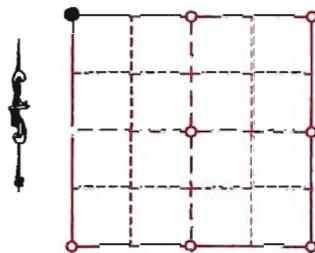

LOCATION

BASIS OF MONUMENT LOCATION

SEAL:

HISTORY FROM SHEBOYGAN COUNTY SURVEYOR DATED 11/22/95
8/28/74 Steven T. Chronis S-913, dug 8'x20' hole and found cluster of 11 stones in 12' area at virgin soil approx. 4' down at NW cor of Section 2-12-22
11/17/75 Peter Wood S-1206, set poured in place concrete monument w/brass cap after road reconstruction
4/24/89 Ed Harvey Jr. S-1489, recovered both concrete monuments w/brass caps caps were gone, rebar to caps still in. accepted rebar as corners. tied corner
6/02/89 Ed Harvey Jr. S-1489, set pk's at grade for both corners after resurfacing
6/28/99 - Kapur and associates found both corners -retied corners
2/10/05 Mark Banton S-1691 - dossier drawn to reflect co-ordinates and elevation from Ozaukee County Remonumentation program.




DATA SHOWN HEREON
IS CERTIFIED AS CORRECT:

Mark Banton 9 Feb 07
Ozaukee County Surveyor

DATE: 10 FEBRUARY 2005

TIE SKETCH

- A = 67.43'
- B = 32.47'
- C = 39.82'
- D = 18.43' (1" IP BENT)
- F = 51.11'
- G = 20.72'
- H = 36.26'

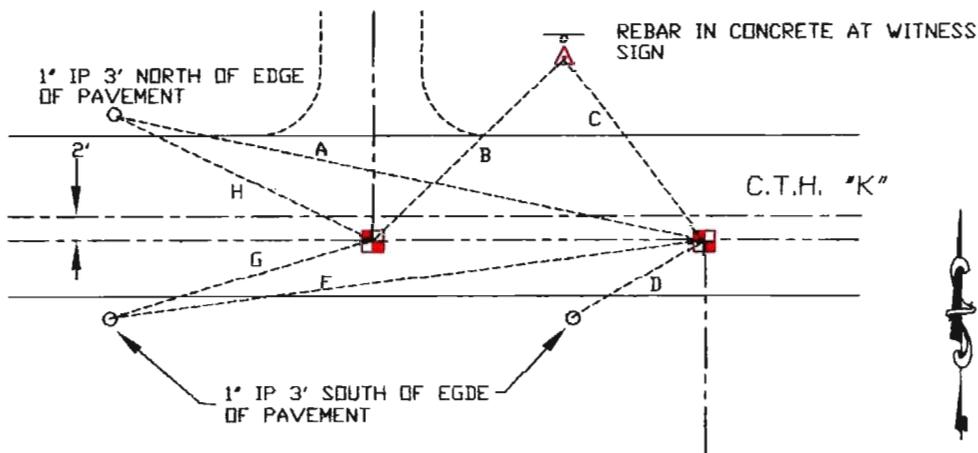

MAINTENANCE RECORD

- MONUMENT LEGEND
- = BERNTSEN MONUMENT (SEE TYPE OF MON ABOVE)
 - = CONCRETE MONUMENT w BRASS CAP
 - = CONCRETE MONUMENT w CROSS
 - = 5/8" REBAR WITH ALUMINUM CAP

DATE	BY WHOM	REMARKS
9 feb 07	m. banton	re-number corner