

# "U.S. PUBLIC LAND SURVEY MONUMENT RECORD" OZAUKEE COUNTY, WISCONSIN

TYPE OF MONUMENT: Concrete Monument w/ brass cap

STATE PLANE COORDINATES: N: 474858.26

E: 2523512.46

ELEVATION: 872.41 M.S.L. DATUM: 1929

FIELD BOOK: \_\_\_\_\_ PAGE: \_\_\_\_\_

FIELDWORK BY: Kapur and Assoc.-Corrected co-ordinates 2003

RECORD DRAWN BY: MARK BANTON

CONTROL ACCURACY:


HORIZONTAL: 3RD ORDER, CLASS 1 VERTICAL: 3RD ORDER

CORNER INDEX No. 259

SECTION 32

TOWNSHIP 10

RANGE 21



LOCATION

BASIS OF MONUMENT LOCATION

SEAL:

1996 - Tom Genske (County Surveyor) found and accepted 3/8" x 18" iron pipe at fence intersection replaced same with concrete monument with brass cap

2003 - Kapur & Assoc - corrected co-ordinates

dossier drawn by Mark Banton (county surveyor) using records and ties produced by Tom Genske




DATA SHOWN HEREON  
IS CERTIFIED AS CORRECT:

*Mark Banton*  
Ozaukee County Surveyor

DATE: 1-9-08

TIE SKETCH

- A = 15.35' @ 11°
- B = 27.53' @ 65°
- C = 27.41' @ 104°
- D = 10.64' @ 256°

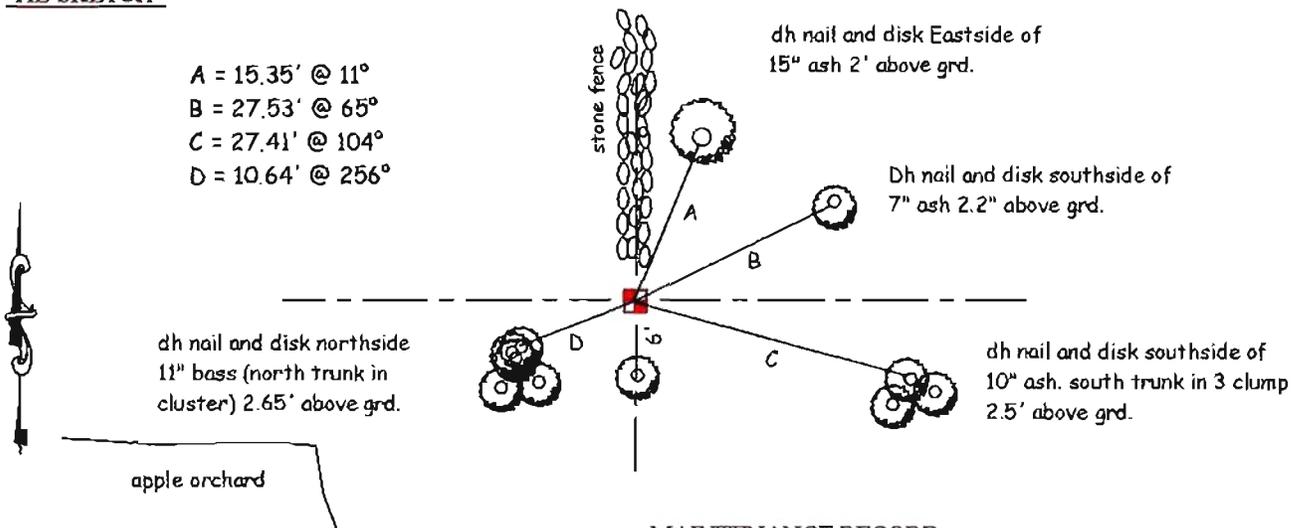

MAINTENANCE RECORD

- MONUMENT LEGEND
- = BERNTSEN MONUMENT (SEE TYPE OF MON. ABOVE)
  - = CONCRETE MONUMENT w/ BRASS CAP
  - = CONCRETE MONUMENT w/ CROSS
  - = 5/8" REBAR WITH ALUMINUM CAP

DATE	BY WHOM	REMARKS