

**"U.S. PUBLIC LAND SURVEY MONUMENT RECORD"  
OZAUKEE COUNTY, WISCONSIN**

**TYPE OF MONUMENT:** SEWRPC CONCRETE MONUMENT

**STATE PLANE COORDINATES:** N: 499315.28

E: 2538467.53

**ELEVATION:** 817.36 **M.S.L. DATUM:** 1929

**FIELD BOOK:** \_\_\_\_\_ **PAGE:** \_\_\_\_\_

**FIELDWORK BY:** KAPUR & ASSOC 1995

**RECORD DRAWN BY:** MARK BANTON

**CONTROL ACCURACY:**


**HORIZONTAL:** 3RD ORDER CLASS 1 **VERTICAL:** 3RD ORDER

**CORNER INDEX No.** 437

**SECTION** 2

**TOWNSHIP** 10

**RANGE** 21

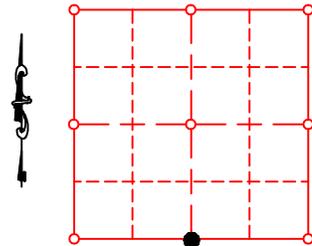

**LOCATION**

**BASIS OF MONUMENT LOCATION**

5/5/86 - Patrick Worden S-1196, excavated at a location using two existing offset PK nails and one existing Ozaukee County concrete monument (3' N & 33' NE'y, respectively and found no corner evidence, placed monument at location indicated by found witness monuments.

Oct 2009 - Mark Banton, Ozaukee County Surveyor, sawcut new pavement to expose SEWRPC concrete monument found 0.60' below road surface, covered monument and placed 1" brass cap w/ county surveyor over the top of monument to mark the location of said corner. Bonestroo set new ties as shown to replace previous ties

**SEAL:**




**DATA SHOWN HEREON  
IS CERTIFIED AS CORRECT:**

*Mark Banton*

Ozaukee County Surveyor

**DATE:** 3/09/10

**TIE SKETCH**

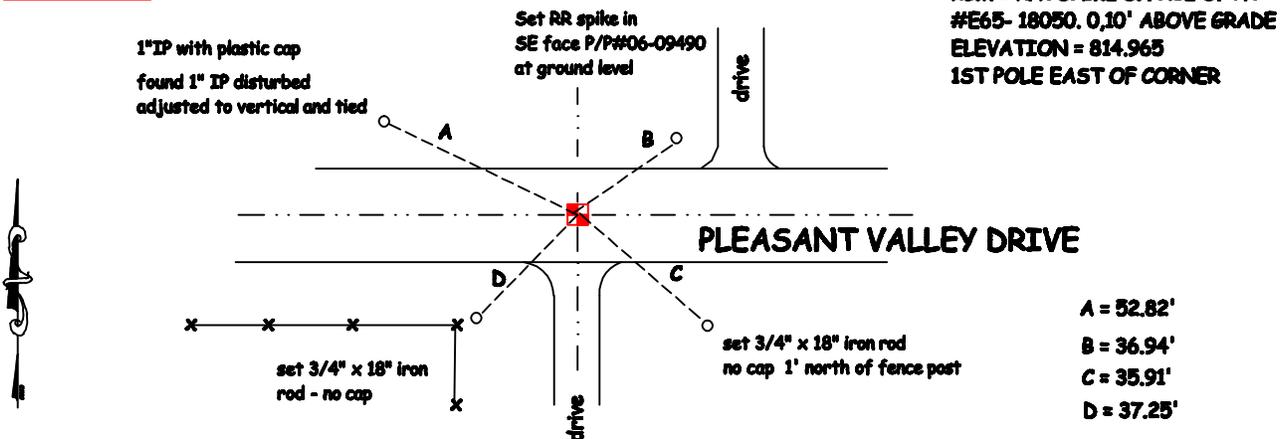

**MAINTENANCE RECORD**

- MONUMENT LEGEND**
- ⊕ = BERNTSEN MONUMENT ( SEE TYPE OF MON. ABOVE)
  - = CONCRETE MONUMENT w/ BRASS CAP
  - = CONCRETE MONUMENT w/ CROSS
  - △ = 5/8" REBAR WITH ALUMINUM CAP

DATE	BY WHOM	REMARKS