


**"U.S. PUBLIC LAND SURVEY MONUMENT RECORD"
OZAUKEE COUNTY, WISCONSIN**

CORNER INDEX No. 457
SECTION 1
TOWNSHIP 10
RANGE 21

TYPE OF MONUMENT: Sewrpc concrete monument
STATE PLANE COORDINATES: N: 502102.66
E: 2540971.27
ELEVATION: 814.44 M.S.L. DATUM: 1929

FIELD BOOK: _____ PAGE: _____
FIELDWORK BY: Patrick Worden - Aero-metric
RECORD DRAWN BY: Mark Banton

CONTROL ACCURACY:
HORIZONTAL: 3RD ORDER, CLASS 1 VERTICAL: 3RD ORDER



LOCATION

BASIS OF MONUMENT LOCATION

Patrick Worden(S-1196) found a PK nail at corner location. Upon excavation Patrick Worden found a square limestone monument. Testimony from adjoining property owner to east also stated this to be the corner. Accepted limestone monument and replaced with standard SEWRPC concrete monument.

Mark Banton- redrawn to show coordinates established by Tom Genske and Kapur & Associates -1995

SEAL:




DATA SHOWN HEREON
IS CERTIFIED AS CORRECT:

Mark Banton
Ozaukee County Surveyor

DATE: 1-9-08

TIE SKETCH

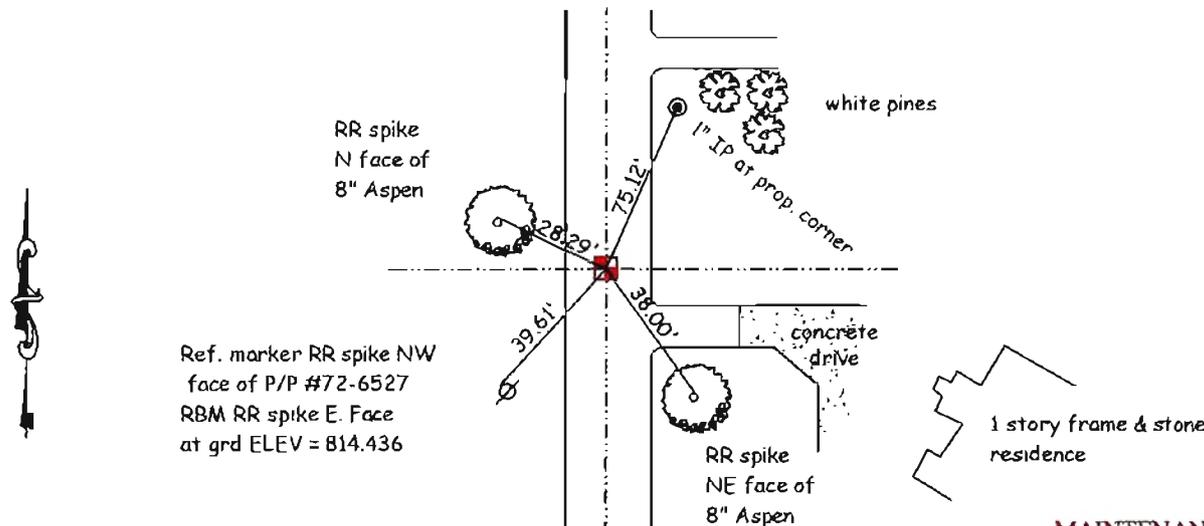

MONUMENT LEGEND

- = BERNTSEN MONUMENT (SEE TYPE OF MON. ABOVE)
- = CONCRETE MONUMENT w/ BRASS CAP
- = CONCRETE MONUMENT w/ CROSS
- = 5/8" REBAR WITH ALUMINUM CAP

MAINTENANCE RECORD

DATE	BY WHOM	REMARKS
1-09-08	M. Banton	re-number corner