

# OZAUKEE COUNTY

## U.S. PUBLIC LAND SURVEY MONUMENT RECORD

Note: This form is intended and designed to fulfill all requirements of Wisconsin Administrative Code, Chapter A-E 5.02, U.S. Public Land Survey Monument Record (3)(a)(b)(c)(d)(e)(f)(g)(h)(i).

(a) CORNER LOCATION: 5 1/4 SECTION 1

TOWNSHIP 12 NORTH

RANGE 21 EAST

TOWN/CITY/VILLAGE FREDONIA

STATE PLANE COORDINATES OF CORNER: \_\_\_\_\_

NORTH \_\_\_\_\_

EAST \_\_\_\_\_

ELEVATION OF CORNER: \_\_\_\_\_ THETA ANGLE: \_\_\_\_\_

Horizontal Datum: Wisconsin State Plane Coordinate System, South Zone  
NORTH AMERICAN DATUM 1927 1983


Vertical Datum: National Geodetic Vertical Datum of 1929

(b)(f)(g)(h) Description of monument found at this corner and if it was accepted, state all evidence (material, testimonial, occupational, plats, records, other monuments) used as a basis for accepting. If not accepted or if nothing was found, state evidence used as a basis for establishing location. If reestablished through lost corner proportionate methods, indicate all monuments, distances and directions used to establish.

Using one remaining concrete witness monument, excavated 25 feet south on fence line extended. Found limestone monument called for on L. Tousley's 1881 map 10 inches below pavement.

Accepted limestone as corner and replaced with Berntsen Aluminum monument.

(c)(d)(e) Plan view of corner with ties to at least 4 witness monuments. If in disagreement with previously established corner, show the distances between the two corners and also indicate the ties to the disputed corner.

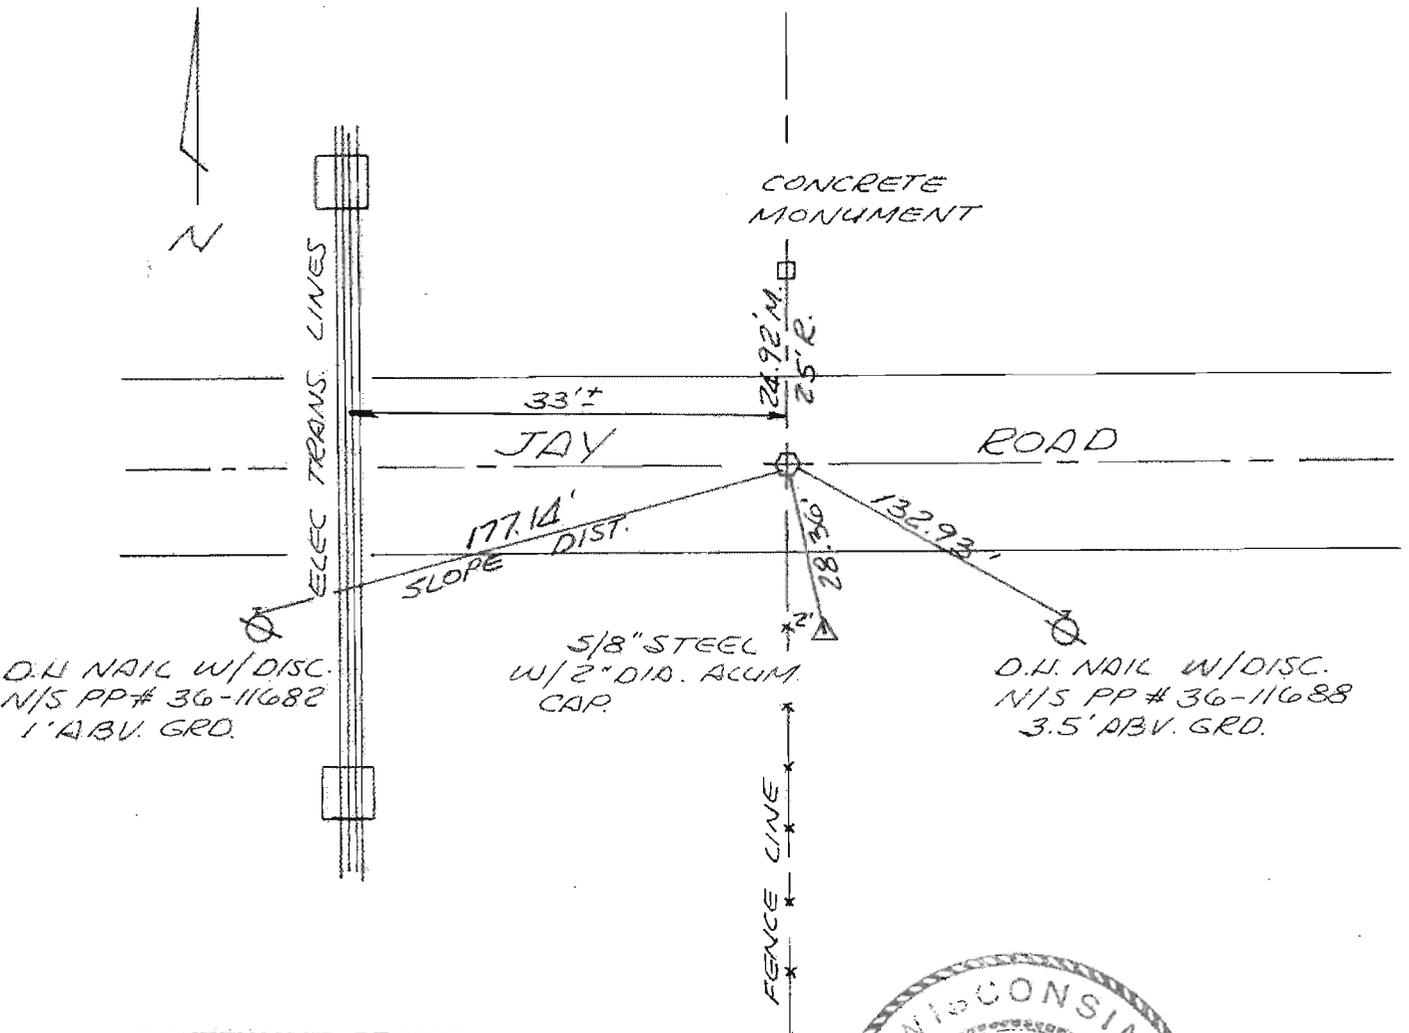

MAINTENANCE RECORD

Date	Init	Remarks



(i) I, THOMAS J. GENSKÉ S- 1317  
 (type or print name) certify that the corner location on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Thomas J. Genske      2/4/92  
 Signature      COUNTY SURVEYOR      Date