

"U.S. PUBLIC LAND SURVEY MONUMENT RECORD"
OZAUKEE COUNTY, WISCONSIN

TYPE OF MONUMENT: Sewrpc concrete monument

STATE PLANE COORDINATES: N: 502102.66

E: 2540971.27

ELEVATION: 814.44 M.S.L. DATUM 1929

FIELD BOOK: _____ PAGE: _____

FIELDWORK BY: Patrick Worden - Aero-metric

RECORD DRAWN BY: Mark Banton

CONTROL ACCURACY:


HORIZONTAL: 3RD ORDER, CLASS 1 VERTICAL: 3RD ORDER

CORNER INDEX No. 457

SECTION 1

TOWNSHIP 10

RANGE 21



LOCATION

SEAL:

BASIS OF MONUMENT LOCATION

Patrick Worden(S-1196) found a PK nail at corner location. Upon excavation Patrick Worden found a square limestone monument. Testimony from adjoining property owner to east also stated this to be the corner. Accepted limestone monument and replaced with standard SEWRPC concrete monument.

Mark Banton- redrawn to show coordinates established by Tom Genske and Kapur & Associates -1995




DATA SHOWN HEREON IS CERTIFIED AS CORRECT:

Mark Banton
 Ozaukee County Surveyor

DATE: 1-9-08

TIE SKETCH

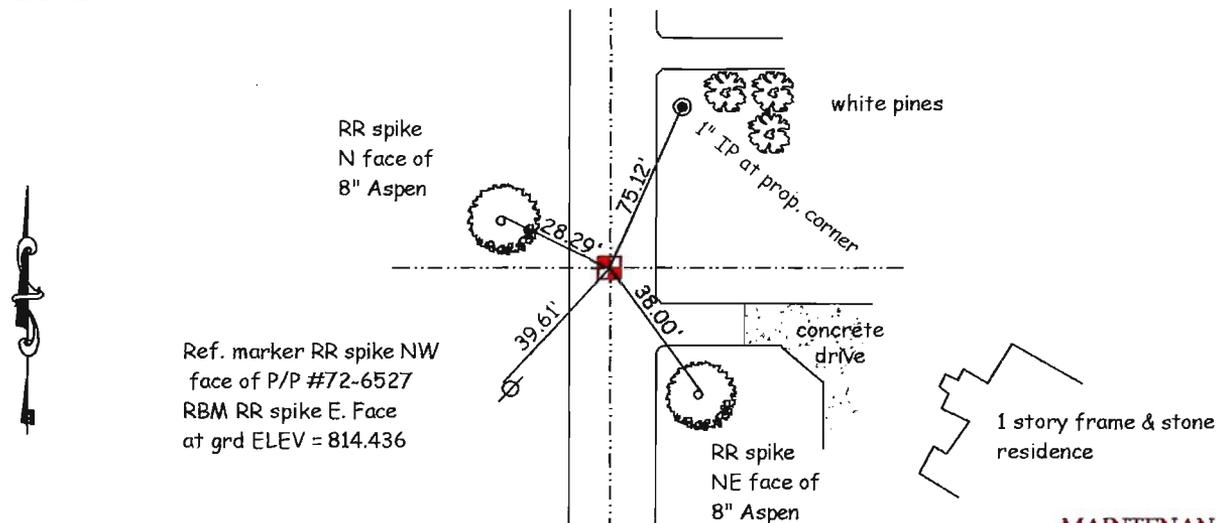

MONUMENT LEGEND

- = BERNTSEN MONUMENT (SEE TYPE OF MON. ABOVE)
- = CONCRETE MONUMENT w/ BRASS CAP
- = CONCRETE MONUMENT w/ CROSS
- = 5/8" REBAR WITH ALUMINUM CAP

MAINTENANCE RECORD

DATE	BY WHOM	REMARKS
1-09-08	M. Banton	re-number corner