

**"U.S. PUBLIC LAND SURVEY MONUMENT RECORD"
OZAUKEE COUNTY, WISCONSIN**

CORNER INDEX No. 481
SECTION 1
TOWNSHIP 10
RANGE 21

TYPE OF MONUMENT: Concrete Monument w/ brass cap

STATE PLANE COORDINATES: N: 505271.45
E: 2546123.30

ELEVATION: 751.07 M.S.L. DATUM: 1929


FIELD BOOK: _____ PAGE: _____

FIELDWORK BY: Kurt Bauer

RECORD DRAWN BY: MARK BANTON

CONTROL ACCURACY:

HORIZONTAL: 3RD ORDER, CLASS 1 VERTICAL: 3RD ORDER



LOCATION

BASIS OF MONUMENT LOCATION

SEAL:

Kurt Bauer found a concrete monument with brass cap as set to mark this corner by Wallace G. Nlenow S-175, in August 1969 on the township line 156 feet south of an old cut Limestone monument then marking the closing corner.



This Dossier was redrawn to reflect the new coordinates as established by Tom Genske and Kapur and Associates in 1995


DATA SHOWN HEREON
IS CERTIFIED AS CORRECT:

Mark Banton
Ozaukee County Surveyor

DATE: Jan 7, 2008

TIE SKETCH

RBM RR spike east face
24" ash 0.5' above grd
ELEV = 750.653
30' +/- nw of corner

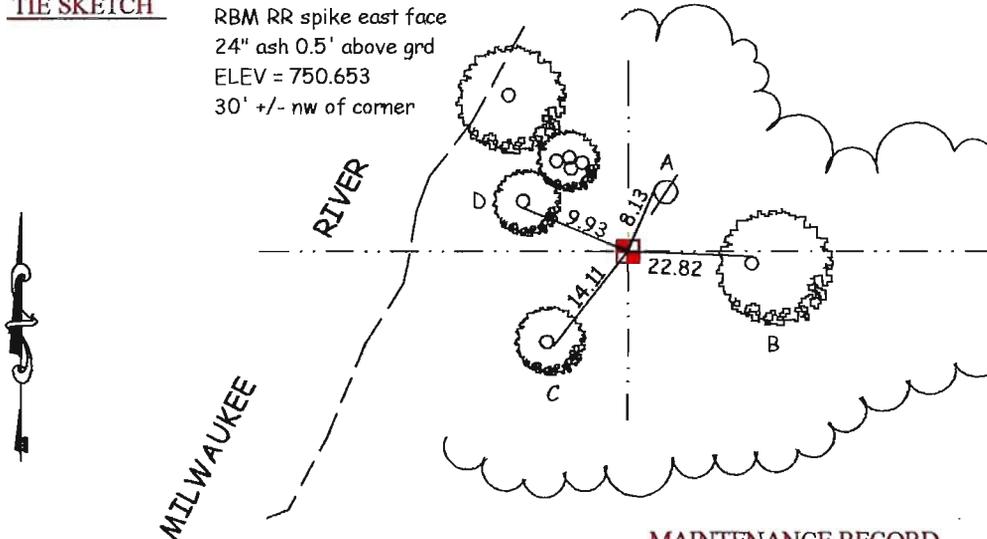

- A. Nail west face of P/P # 72-13882
- B. Nail in north face of 20" ash 3' above grd
- C. nail east face of 6" ash, 3' above grd
- D. nail in west face of 8" linden

MAINTENANCE RECORD

MONUMENT LEGEND

- = BERNTSEN MONUMENT (SEE TYPE OF MON. ABOVE)
- = CONCRETE MONUMENT w/ BRASS CAP
- = CONCRETE MONUMENT w/ CROSS
- = 5/8" REBAR WITH ALUMINUM CAP

DATE	BY WHOM	REMARKS
<u>1-7-08</u>	<u>MHB</u>	<u>RE-NUMBER</u>