

"U.S. PUBLIC LAND SURVEY MONUMENT RECORD"
OZAUKEE COUNTY, WISCONSIN

TYPE OF MONUMENT: Concrete monument w/brass cap

STATE PLANE COORDINATES: N: 476202.92

E: 2555192.87

ELEVATION: 699.36 M.S.L. DATUM: 1929

FIELD BOOK: 1 PAGE: 74

FIELDWORK BY: Tom Genske & kapur and Associates

RECORD DRAWN BY: MARK BANTON from Tom Genske fieldnotes

CONTROL ACCURACY:


HORIZONTAL: 3RD ORDER CLASS 1 VERTICAL: 3RD ORDER

CORNER INDEX No. 271

SECTION 32

TOWNSHIP 10

RANGE 22

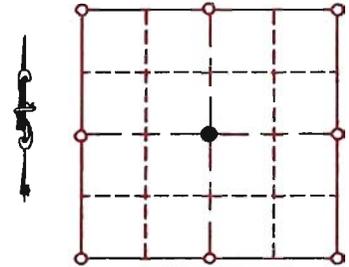

LOCATION

SEAL:



BASIS OF MONUMENT LOCATION


1995- Tom Genske (county surveyor)-using 1 remaining 1963 tie found an 8" spike that checked with Hinze's 1991 plat of survey accepted spike as center and replaced with concrete monument with brass cap.

DATA SHOWN HEREON
IS CERTIFIED AS CORRECT:

Mark Banton
Ozaukee County Surveyor

DATE: 14 Jan 08

TIE SKETCH

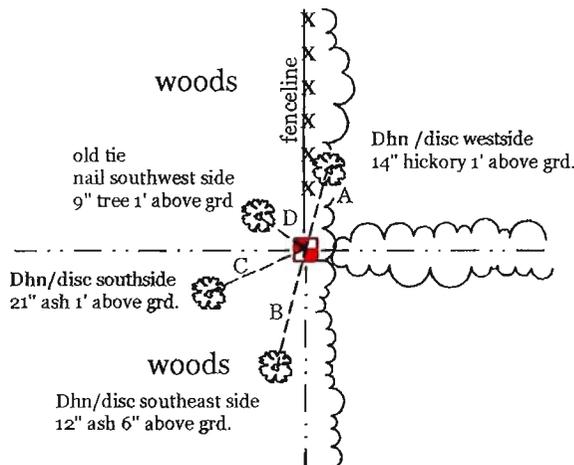

- A = 19.65' @ 2°
- B = 21.61' @ 197°
- C = 14.41' @ 240°
- D = 3.81' @ 291°

MAINTENANCE RECORD

- MONUMENT LEGEND
- = BERNTSEN MONUMENT (SEE TYPE OF MON. ABOVE)
 - = CONCRETE MONUMENT w/ BRASS CAP
 - = CONCRETE MONUMENT w/ CROSS
 - = 5/8" REBAR WITH ALUMINUM CAP

DATE	BY WHOM	REMARKS
14 Jan 2008	M. Banton	re-draw and re-number corner