

OZAUKEE COUNTY

U.S. PUBLIC LAND SURVEY MONUMENT RECORD

U.S. P.L.S. CORNER $\frac{5}{5} \frac{4}{4}$ T. 11 N., R. 22 E. OZAUKEE COUNTY, WI

GEODETTIC SURVEY BY: KAPUR & ASSOCIATES, INC. YEAR: 1997

STATE PLANE COORDINATES OF: _____

NORTH 535202.62

EAST 2562771.61

ELEVATION OF STATION: 729.50

HORIZONTAL DATUM: WISCONSIN STATE PLANE COORDINATE, SOUTH ZONE
NORTH AMERICAN DATUM: X 1927 _____ 1983
VERTICAL DATUM: NATIONAL GEODETTIC VERTICAL DATUM OF 1929

CONTROL ACCURACY: _____ THETA ANGLE: 1-27-22.60

HORIZONTAL: 3RD ORDER, CLASS 1: VERTICAL: 3RD ORDER

DESCRIPTION OF MONUMENT AND HOW LOCATION WAS DETERMINED:

FOUND NAIL AT FENCE INTERSECTION AS CALLED FOR ON PREVIOUS SURVEYS.
REPLACED WITH CONCRET MONUMENT W/BRASS CAP.

CERTIFICATION

I CERTIFY THAT THE CORNER LOCATION ON THIS RECORD WAS DETERMINED BY ME OR UNDER MY DIRECTION AND CONTROL AND THAT THIS U.S. PUBLIC LAND SURVEY MONUMENT RECORD IS CORRECT AND COMPLETE TO THE BEST OF MY KNOWLEDGE AND BELIEF.

SIGNATURE Thomas J. Genske S-1317
OZAUKEE COUNTY SURVEYOR




DATE: 6/10/98

OZAUKEE COUNTY

U.S. PUBLIC LAND SURVEY MONUMENT RECORD

PLAN VIEW OF CORNER WITH TIES TO A MINIMUM OF 4 WITNESS MONUMENTS

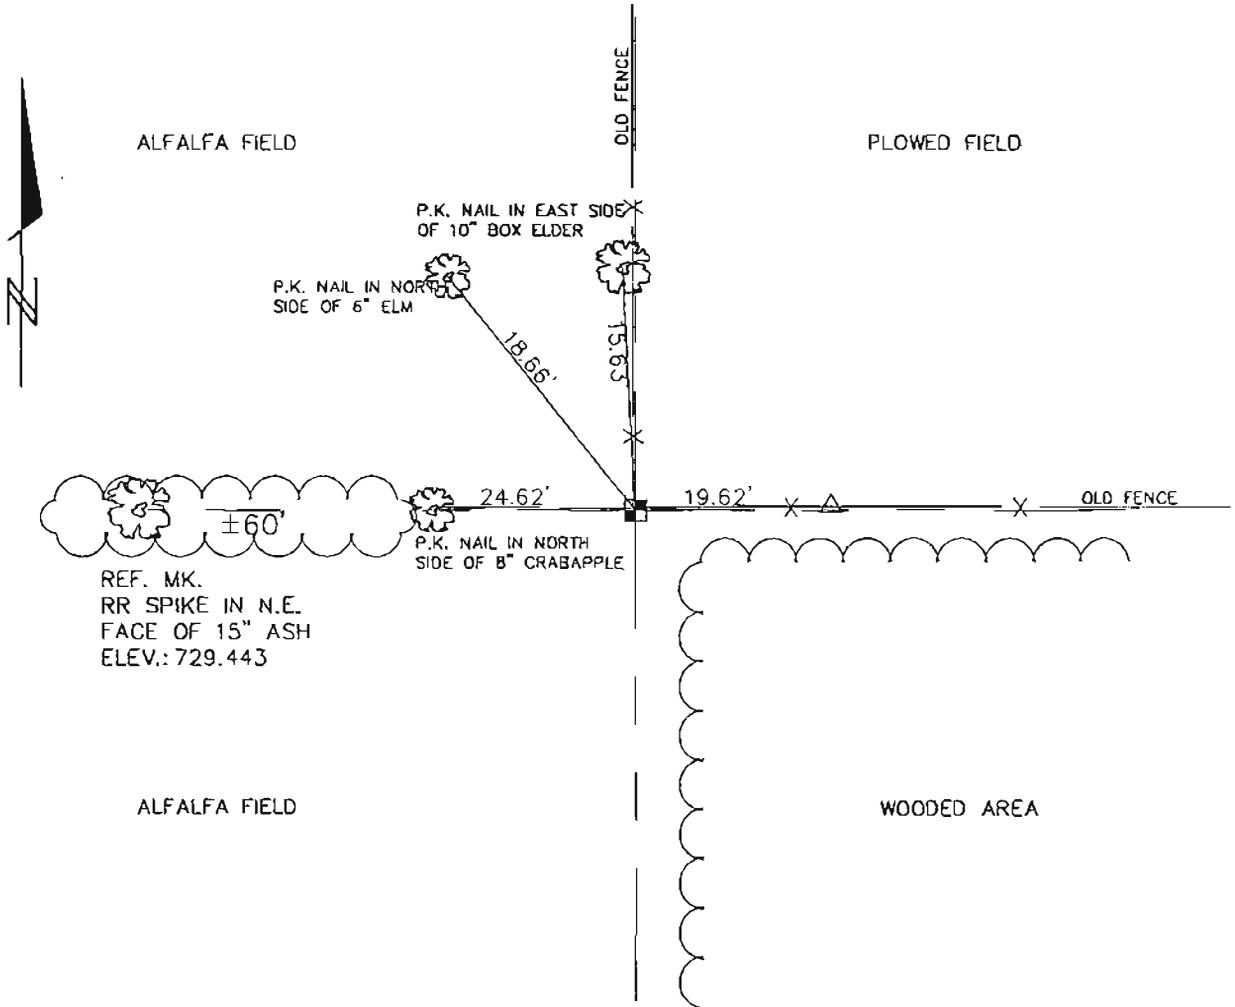

MAINTENANCE RECORD

MONUMENT LEGEND

DATE	INITIAL	REMARKS
10/7/97	B.E.S.	
_____	_____	_____
_____	_____	_____
_____	_____	_____
_____	_____	_____

- ⊕ = BERNTSEN ALUMINUM MONUMENT
- = CONCRETE WITH BRASS CAP
- ⊞ = CONCRETE WITH CROSS
- △ = 3/4" REBAR