

"U.S. PUBLIC LAND SURVEY MONUMENT RECORD"
OZAUKEE COUNTY, WISCONSIN

CORNER INDEX No. 476
 SECTION 36
 TOWNSHIP 11
 RANGE 21

TYPE OF MONUMENT: concrete monument with brass cap

STATE PLANE COORDINATES: N: 5058581.24
 E: 2552997.75

ELEVATION: 790.14 M.S.L. DATUM: 1929

THETA ANGLE: _____


FIELD BOOK: _____ PAGE: _____

FIELDWORK BY: KAPUR AND ASSOCIATES/TOM GENSKE 1998

RECORD DRAWN BY: MARK BANTON

CONTROL ACCURACY:

HORIZONTAL: 3RD ORDER CLASS 1 VERTICAL: 3RD ORDER



LOCATION

SEAL:

BASIS OF MONUMENT LOCATION

1986 - Kurt Bauer -found a cast iron plate in blacktop roadway which did not agree with recorded description of monument I referenced and removed said plate and found deteriorated concrete monument with brass cap as set to mark this corner. I referenced said concrete monument: accepting the center of the brass plug as marking the corner. the cast iron plate was found to be 0.09' east and 0.08' north of center of the brass cap. I replaced old monument with new concrete monument with brass cap.

1998 - Kapur and Associates re-monumentation program for Ozaukee County resulting in new co-ordinates




DATA SHOWN HEREON
 IS CERTIFIED AS CORRECT:

Mark Banton
 Ozaukee County Surveyor

DATE: 1/29/08

TIE SKETCH

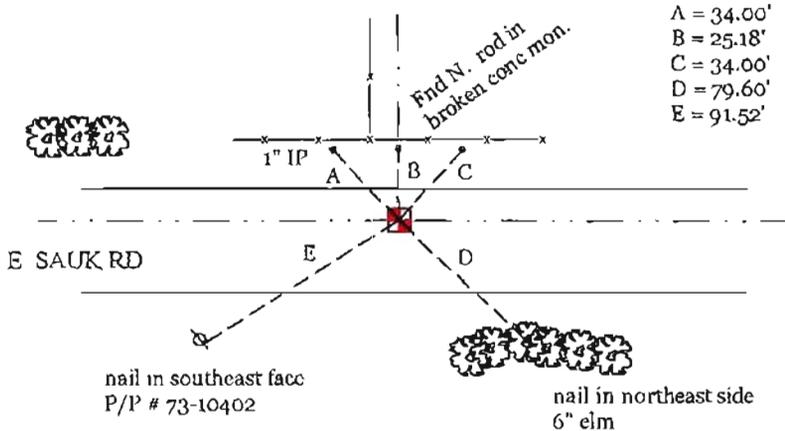

A = 34.00'
 B = 25.18'
 C = 34.00'
 D = 79.60'
 E = 91.52'

MAINTENANCE RECORD

- MONUMENT LEGEND
- = BERNTSEN MONUMENT (SEE TYPE OF MON. ABOVE)
 - = CONCRETE MONUMENT w/ BRASS CAP
 - = CONCRETE MONUMENT w/ CROSS
 - = 5/8" REBAR WITH ALUMINIUM CAP

DATE	BY WHOM	REMARKS
1/29/08	M. BANTON	Redraw for new co-ordinates & re-number corner