

**"U.S. PUBLIC LAND SURVEY MONUMENT RECORD"
OZAUKEE COUNTY, WISCONSIN**

CORNER INDEX No. 478
SECTION 36
TOWNSHIP 11
RANGE 21

TYPE OF MONUMENT: berntsen aluminum monument with brass cap

STATE PLANE COORDINATES: N: 505438.41

E: 2550324.87

ELEVATION: 778.73 M.S.L. DATUM: 1929

THETA ANGLE: _____


FIELD BOOK: 2 PAGE: 34

FIELDWORK BY: KAPUR AND ASSOCIATES/TOM GENSKE 1994

RECORD DRAWN BY: MARK BANTON

CONTROL ACCURACY:

HORIZONTAL: 3RD ORDER, CLASS 1 VERTICAL: 3RD ORDER

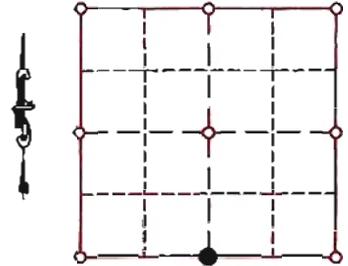

LOCATION

BASIS OF MONUMENT LOCATION

SEAL:

1986- Kurt Bauer found a concrete monument with brass cap as set to mark this corner by J.Eide, S-3, in 1966; replacing a old cut limestone monument 1 foot below the surface then marking this corner and referenced the same.

1994 - Tom Genske County Surveyor - using 2 existing ties found 4" stones on top of concrete monument with brass cap as set by Kurt Bauer. no marking on brass cap. top of concrete beginning to deteriorate. replaced monument.




DATA SHOWN HEREON
IS CERTIFIED AS CORRECT:

Mark H. Banton
Ozaukee County Surveyor

DATE: 1/29/08

TIE SKETCH

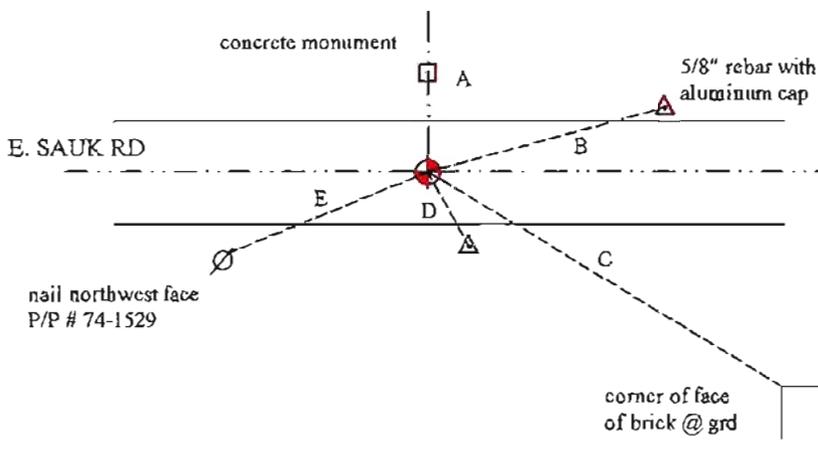

- A = 25.25' @ 0°
- B = 42.20' @ 70°
- C = 104.31' @ 155°
- D = 11.78' @ 176°
- E = 57.78' @ 250°

MAINTENANCE RECORD

- MONUMENT LEGEND
- = BERNTSEN MONUMENT (SEE TYPE OF MON. ABOVE)
 - = CONCRETE MONUMENT w/ BRASS CAP
 - = CONCRETE MONUMENT w/ CROSS
 - = 5/8" REBAR WITH ALUMINUM CAP

DATE	BY WHOM	REMARKS
1/29/08	M. BANTON	Redraw from tie sheet and re-number corner