

**"U.S. PUBLIC LAND SURVEY MONUMENT RECORD"
OZAUKEE COUNTY, WISCONSIN**

TYPE OF MONUMENT: 3/4"x 12' solid aluminum rod with aluminum cap

STATE PLANE COORDINATES: N: 510036.77

E: 2528970.14

ELEVATION: 867.48 M.S.L. DATUM: 1929

THETA ANGLE: _____

FIELD BOOK: 3 PAGE: 28

FIELDWORK BY: TOM GENSKE 1996, KAPUR AND ASSOCIATES 1998

RECORD DRAWN BY: MARK BANTON

CONTROL ACCURACY:


HORIZONTAL: 3RD ORDER, CLASS 1 VERTICAL: 3RD ORDER

CORNER INDEX No. 539

SECTION 32

TOWNSHIP 11

RANGE 21



LOCATION

BASIS OF MONUMENT LOCATION

1996 - TOM GENSKE, OZAUKEE COUNTY SURVEYOR SET A 3/4" X 12" ALUMINUM ROD ON A STRAIGHT LINE INTERSECTION SINGLE PROPORTION METHOD SEARCHED FOR EXISTING MONUMENT AT THIS LOCATION IN 1995 NOTHING FOUND CORNER 12.4' NORTH OF UW EXTENSION "BOARDWALK TRAIL"

1998- KAPUR AND ASSOCIATES ESTABLISHED CO-ORDINATES AS PART OF OZAUKEE COUNTY REMONUMENTATION PROGRAM

SEAL:




DATA SHOWN HEREON IS CERTIFIED AS CORRECT:

Mark Banton
Ozaukee County Surveyor

DATE: 11 Dec 08

TIE SKETCH

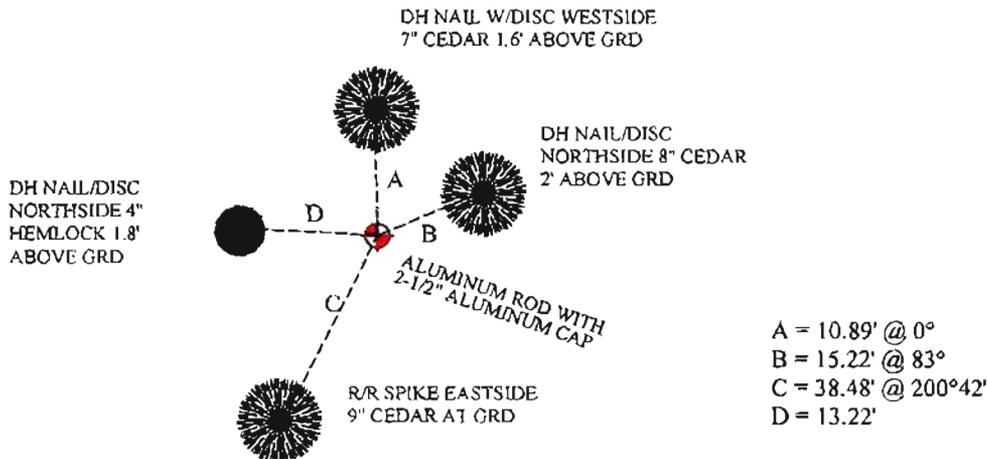

MAINTENANCE RECORD

DATE	BY WHOM	REMARKS
DEC 2008	M. BANTON	Redraw from tie sheet and re-number corner

MONUMENT LEGEND

- = BERNTSEN MONUMENT (SEE TYPE OF MON. ABOVE)
- = CONCRETE MONUMENT w/ BRASS CAP
- = CONCRETE MONUMENT w/ CROSS
- = 5/8" REBAR WITH ALUMINUM CAP