

**"U.S. PUBLIC LAND SURVEY MONUMENT RECORD"  
OZAUKEE COUNTY, WISCONSIN**

TYPE OF MONUMENT: Bernsten aluminum monument

STATE PLANE COORDINATES: N: 515636.46

E: 2539339.41

ELEVATION: 839.30 M.S.L. DATUM: 1929

THETA ANGLE: \_\_\_\_\_

FIELD BOOK: \_\_\_\_\_ PAGE: \_\_\_\_\_

FIELDWORK BY: KAPUR AND ASSOCIATES 1998

RECORD DRAWN BY: MARK BANTON

CONTROL ACCURACY:


HORIZONTAL: 3RD ORDER CLASS 1 VERTICAL: 3RD ORDER

CORNER INDEX No. 573

SECTION 27

TOWNSHIP 11

RANGE 21

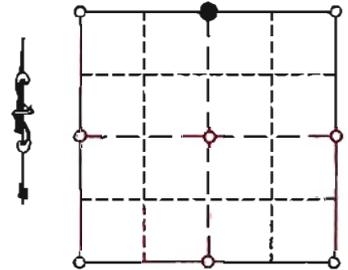

LOCATION

SEAL:

BASIS OF MONUMENT LOCATION

1986 - Rich Harder found boat spike flush with pavement surface

1989 - Tom Genske - Ozaukee County Surveyor using tie sheets on file in County Survey Office, found boat spike with chisel cross, offset spike found. Limestone monument found 6" below pavement damaged top on limestone. center fit spike, accepted and replaced with Bernsten aluminum monument

1998 - Kapur and Associates set ties as shown



DATA SHOWN HEREON  
IS CERTIFIED AS CORRECT:


Mark Banton  
Ozaukee County Surveyor

DATE: 11/20/08

TIE SKETCH

PP # 94-04936

PK nail 6' above grd.

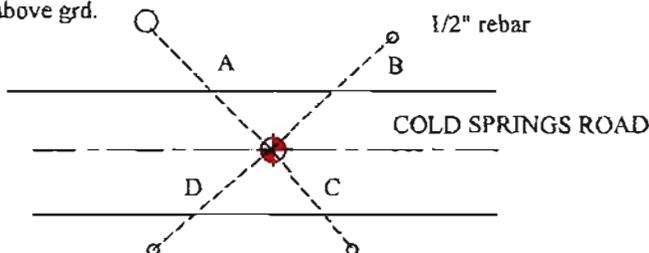

- A = 37.00'
- B = 19.92'
- C = 17.17'
- D = 24.64'

MAINTENANCE RECORD

- MONUMENT LEGEND**
- = BERNSTEN MONUMENT (SEE TYPE OF MON. ABOVE)
  - = CONCRETE MONUMENT w/ BRASS CAP
  - = CONCRETE MONUMENT w/ CROSS
  - = 5/8" REBAR WITH ALUMINUM CAP

DATE	BY WHOM	REMARKS
11/20/08	M. BANTON	Redraw from tie sheet and re-number corner