

OZAUKEE COUNTY

U.S. PUBLIC LAND SURVEY MONUMENT RECORD

Note: This form is intended and designed to fulfill all requirements of Wisconsin Administrative Code, Chapter A-E 5.02, U.S. Public Land Survey Monument Record (3)(a)(b)(c)(d)(e)(f)(g)(h)(i).

(a) CORNER LOCATION: W 1/4 SECTION 22

TOWNSHIP 11 NORTH

* KAPUR & ASSOC 1998
REMON Program

RANGE 21 EAST

TOWN/CITY/VILLAGE SAUKVILLE

STATE PLANE COORDINATES OF CORNER:

* NORTH 518202.82
EAST 2536615.23

ELEVATION OF CORNER: _____ THETA ANGLE: _____

Horizontal Datum: Wisconsin State Plane Coordinate System, South Zone
NORTH AMERICAN DATUM X 1927 _____ 1983


Vertical Datum: National Geodetic Vertical Datum of 1929

(b)(f)(g)(h) Description of monument found at this corner and if it was accepted, state all evidence (material, testimonial, occupational, plats, records, other monuments) used as a basis for accepting. If not accepted or if nothing was found, state evidence used as a basis for establishing location. If reestablished through lost corner proportionate methods, indicate all monuments, distances and directions used to establish.

Using the existing ties, I found the railroad spike with center in cross.


Accepted railroad spike as corner and replaced with Berntsen monument.

(c)(d)(e) Plan view of corner with ties to at least 4 witness monuments. If in disagreement with previously established corner, show the distances between the two corners and also indicate the ties to the disputed corner.

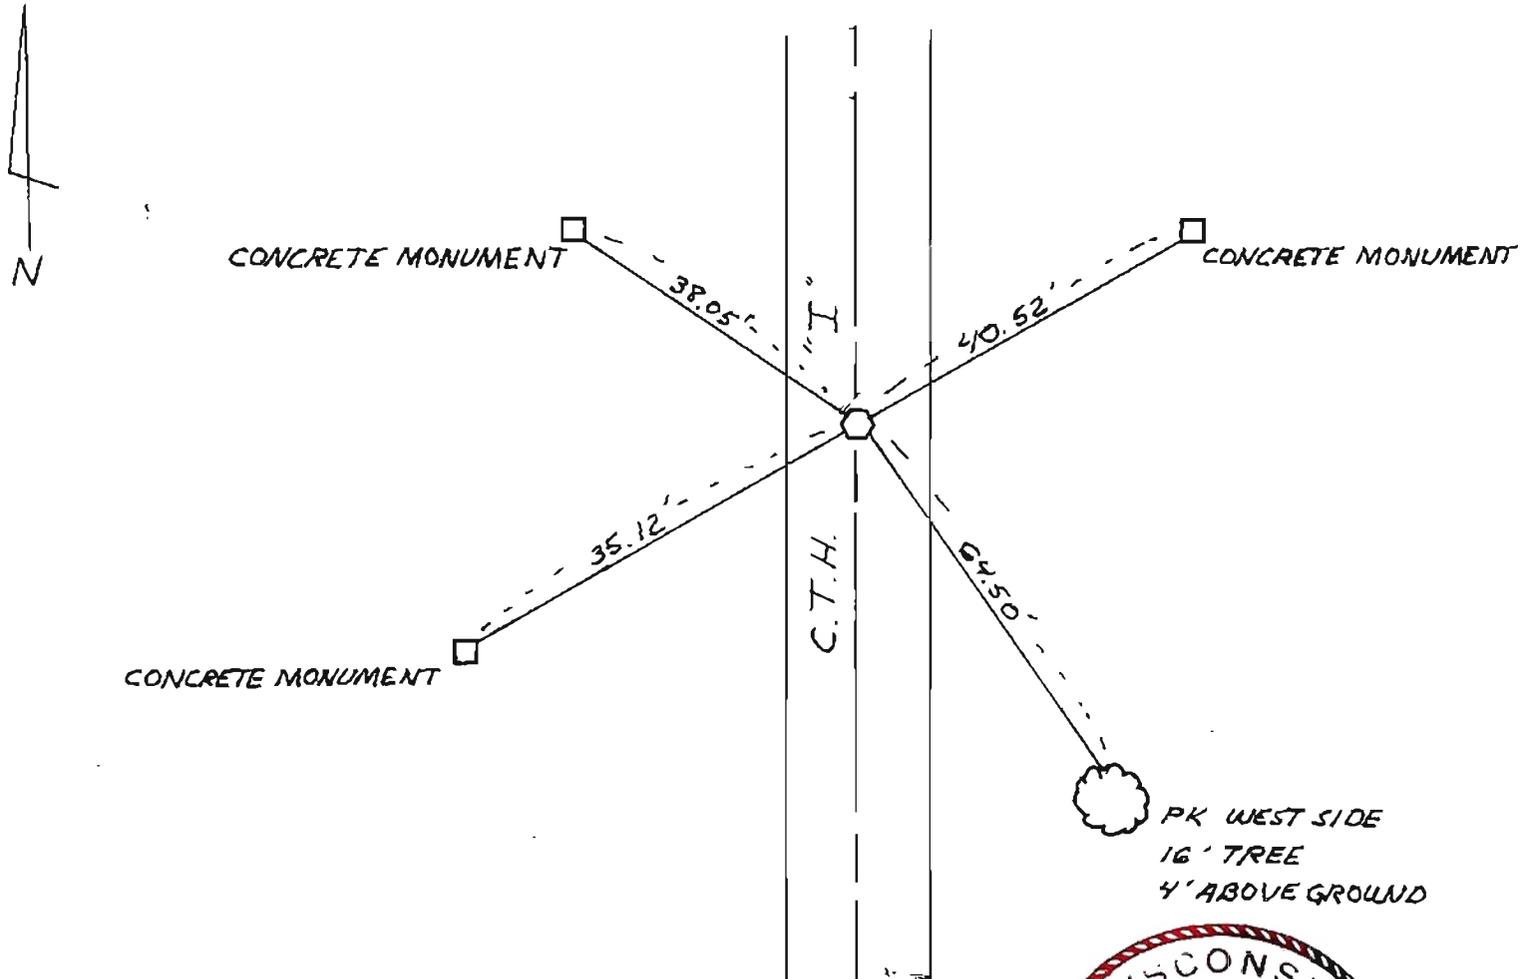

MAINTENANCE RECORD

Date	Init	Remarks

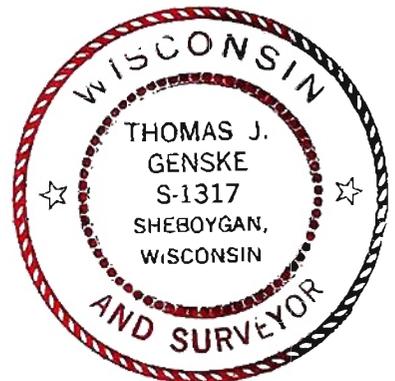

(i) I, THOMAS J GENSKE S-1317
 (type or print name) certify that the corner location on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Thomas J. Genske
 Signature COUNTY SURVEYOR
 Date 6/18/93