

627

OZAUKEE COUNTY  
U.S. PUBLIC LAND SURVEY MONUMENT RECORD

U.S. P.L.S. CORNER  $\frac{16}{16} | \frac{16}{16}$  T. 11 N., R. 21 E. OZAUKEE COUNTY, WI

GEODETIC SURVEY BY: KAPUR & ASSOCIATES, INC. YEAR: 1997

STATE PLANE COORDINATES OF:  
NORTH 523427.86  
EAST 2533801.01

ELEVATION OF STATION: 934.54

HORIZONTAL DATUM: WISCONSIN STATE PLANE COORDINATE, SOUTH ZONE  
NORTH AMERICAN DATUM: X 1927 1983  
VERTICAL DATUM: NATIONAL GEODETIC VERTICAL DATUM OF 1929

CONTROL ACCURACY: THETA ANGLE: 1-22-50.18

HORIZONTAL: 3RD ORDER, CLASS 1; VERTICAL: 3RD ORDER

**DESCRIPTION OF MONUMENT AND HOW LOCATION WAS DETERMINED:**

FOUND LIMESTONE. SET CONC. MONUMENT W/ BRASS CAP.

**CERTIFICATION**

I CERTIFY THAT THE CORNER LOCATION ON THIS RECORD WAS DETERMINED BY ME OR UNDER MY DIRECTION AND CONTROL AND THAT THIS U.S. PUBLIC LAND SURVEY MONUMENT RECORD IS CORRECT AND COMPLETE TO THE BEST OF MY KNOWLEDGE AND BELIEF.




SIGNATURE Thomas J. Genske S-1317 DATE: 6/10/98  
OZAUKEE COUNTY SURVEYOR

# OZAUKEE COUNTY

## U.S. PUBLIC LAND SURVEY MONUMENT RECORD

### PLAN VIEW OF CORNER WITH TIES TO A MINIMUM OF 4 WITNESS MONUMENTS

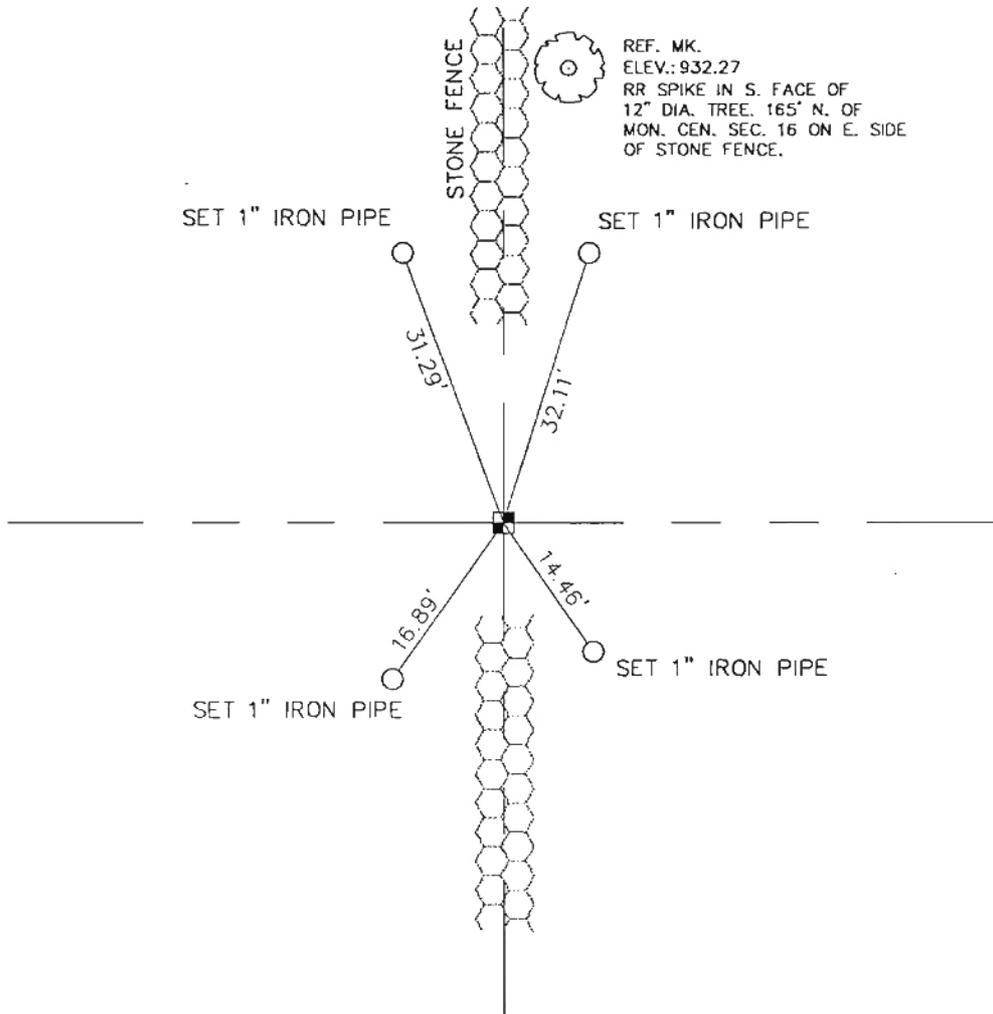

REF. MK.  
 ELEV.: 932.27  
 RR SPIKE IN S. FACE OF  
 12" DIA. TREE, 165' N. OF  
 MON. CEN. SEC. 16 ON E. SIDE  
 OF STONE FENCE.

#### MAINTENANCE RECORD

#### MONUMENT LEGEND

DATE	INITIAL	REMARKS
3/6/98	B.E.S.	

- ⊗ = BERNTSEN ALUMINUM MONUMENT
- ⊠ = CONCRETE WITH BRASS CAP
- ⊕ = CONCRETE WITH CROSS
- △ = 5/8" REBAR WITH ALUMINUM CAP
- = 1" IRON PIPE