

"U.S. PUBLIC LAND SURVEY MONUMENT RECORD"
OZAUKEE COUNTY, WISCONSIN

CORNER INDEX No. 716
 SECTION 9
 TOWNSHIP 11
 RANGE 21

TYPE OF MONUMENT: Bernsten aluminum monument

STATE PLANE COORDINATES: N: 533945.39

E: 2530936.01

ELEVATION: 894.16 M.S.L. DATUM: 1929

THETA ANGLE: _____


FIELD BOOK: 2 PAGE: 37

FIELDWORK BY: TOM GENSKE 1994

RECORD DRAWN BY: MARK BANTON

CONTROL ACCURACY: _____

HORIZONTAL: 3RD ORDER, CLASS 1 VERTICAL: 3RD ORDER

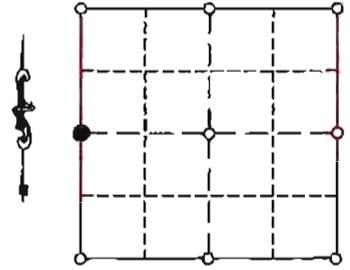

LOCATION

BASIS OF MONUMENT LOCATION

SEAL:

1994 - Tom Genske - Ozaukee County Surveyor using existing concrete monument ties found PK nail 2" below road surface, limestone monument with damaged top found 15" below pavement and 4" east. accepted center of limestone as corner and replaced with Bernsten aluminum monument.




DATA SHOWN HEREON IS CERTIFIED AS CORRECT:

Mark Banton
 Ozaukee County Surveyor

DATE: 11/10/08

TIE SKETCH

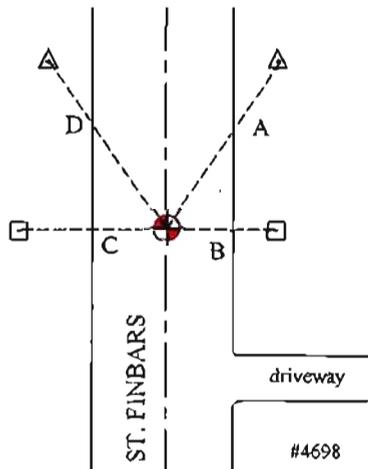

- A = 45.05' @ 21°
- B = 32.39' @ 90°
- C = 33.45' @ 271°
- D = 46.84' @ 338°



MONUMENT LEGEND

- = BERNTSEN MONUMENT (SEE TYPE OF MON. ABOVE)
- = CONCRETE MONUMENT w/ BRASS CAP
- = CONCRETE MONUMENT w/ CROSS
- = 5/8" REBAR WITH ALUMINUM CAP

MAINTENANCE RECORD

DATE	BY WHOM	REMARKS
11/10/08	M BANTON	Redraw from tie sheet and re-number corner