

**"U.S. PUBLIC LAND SURVEY MONUMENT RECORD"
OZAUKEE COUNTY, WISCONSIN**

TYPE OF MONUMENT: Berntsen monument w/brass cap buried placed 1-1/8" dia brass marker at surface

STATE PLANE COORDINATES: N: 497277.11
E: 2549098.38

ELEVATION: 763.69 M.S.L. DATUM: 1929

FIELD BOOK: grifton PAGE: 5


FIELDWORK BY: Mark Banton

RECORD DRAWN BY: Mark Banton

CONTROL ACCURACY:

HORIZONTAL: 3RD ORDER, CLASS 1 VERTICAL: 3RD ORDER

CORNER INDEX No. 420
SECTION 7
TOWNSHIP 10
RANGE 22

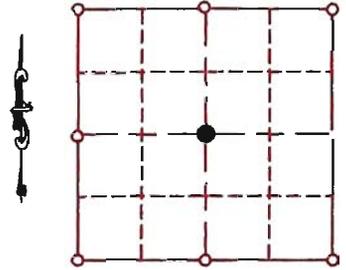

LOCATION

BASIS OF MONUMENT LOCATION

1994- Tom Genske (county surveyor)- replaced SEWRPAC concrete monument with a damaged top. The top 6" of monument had disintegrated. Using center of top, replaced with a Berntsen monument with 1" riser.

2005 - Mark Banton (County Surveyor) placed a 1-1/8" diameter brass marker over bernsten monument that was buried during reconstruction and set new ties as needed.

SEAL:




DATA SHOWN HEREON IS CERTIFIED AS CORRECT:

Mark Banton
Ozaukee County Surveyor

DATE: 1/24/08

TIE SKETCH

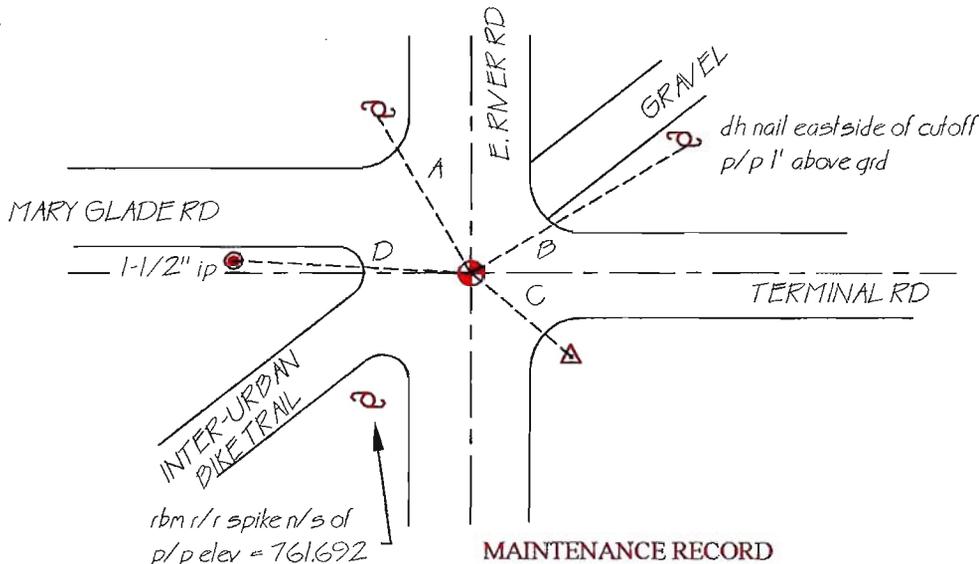

A = 54.73'
B = 102.45'
C = 45.26'
D = 64.39'

MAINTENANCE RECORD

MONUMENT LEGEND

- = BRASS MARKER
- = CONCRETE MONUMENT w/ BRASS CAP
- = CONCRETE MONUMENT w/ CROSS
- = ALUMINUM ROD WITH ALUMINUM CAP

DATE	BY WHOM	REMARKS
1/24/08	M. Banton	re-number to match new numbering system